


REACH & RoHS
COMPLIANT





REV.	ECN / DESCRIPTION	BY	DATE
A0	NEW	ZG.HU	2017.11.8

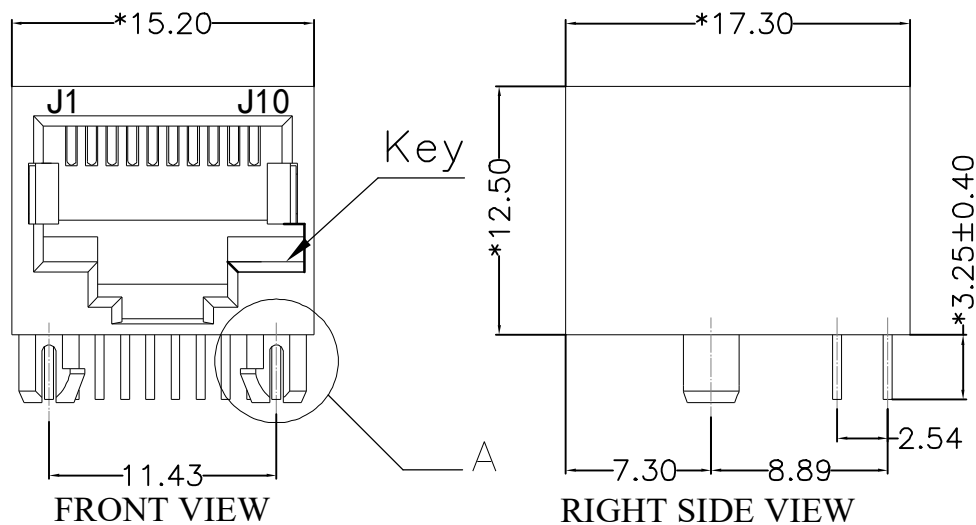

MATERIAL:
HOUSING: PBT,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE $\varnothing=0.46\text{MM}$.
6U" GOLD PLATING ON CONTACT AREA.

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
STORAGE TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

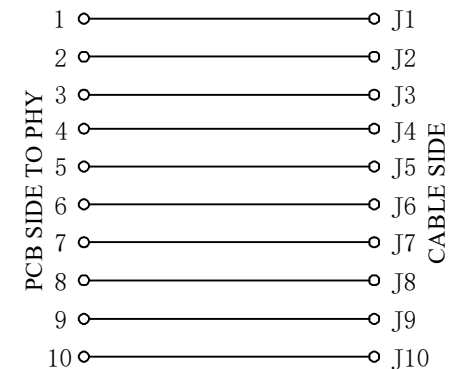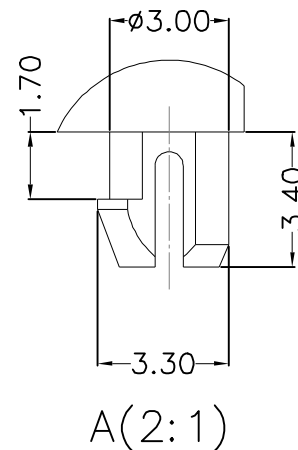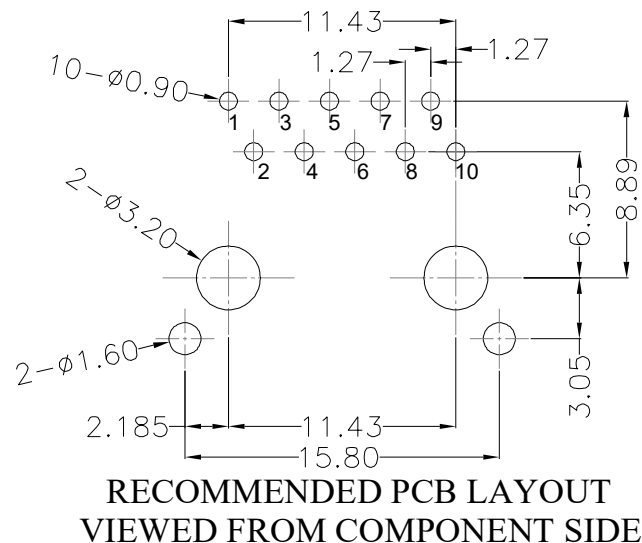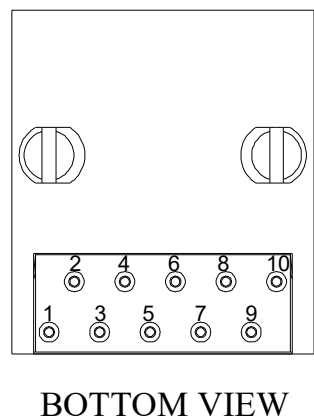

DGKYD

东莞市科优达电子科技有限公司
Dong Guan Ke You Da Electronic Tech.Co.,Ltd

ADD : No.1 LiHe Street,LiHeng Village,Qingxi town, DongGuan City,GuangDong Province
Tel:+86-0769-87334608; Fax:+86-0769-87847129 WWW.DGKYD.COM

TITLE:	SIZE	UNITS	GENERAL TOLERANCES		APPROVED BY:
5621 1X1 10P10C 全塑	A4	MM[INCH]	UNLESS SPECIFIED		JP.Gong
PART NO.:	SACLE	REV	x \pm 0.35	x $^{\circ}$ \pm 3.0 $^{\circ}$	CHECKED BY:
DGKYD5621K11111IWA1DY4	1:1	A0	x \pm 0.30	x $^{\circ}$ \pm 2.0 $^{\circ}$	TW.Xu
REMARK:	SHEET		.xx \pm 0.25	.xx $^{\circ}$ \pm 1.5 $^{\circ}$	DESIGND BY:
	1/1		.xxx \pm 0.10	.xxx $^{\circ}$ \pm 1.0 $^{\circ}$	ZG.Hu